


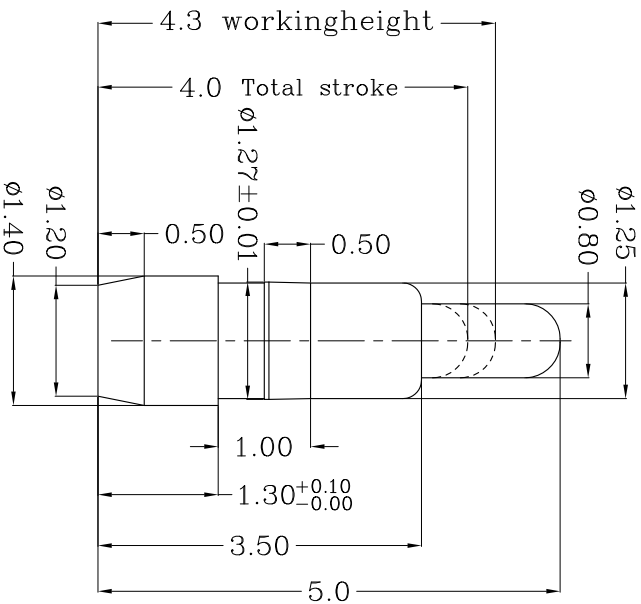

Notes:

1) Material(材质):

- 1) Body : Brass
- 2) Plunge : Brass
- 3) Spring : Stainless steel wire

2) Plating(电镀):

- 1) Body : min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀 0.1um Min 镍底1.4um Min)
- 2) Plunge : min 0.4um Gold plating over min. 1.4um Nickel plating (Plunge: 镀 0.4um Min 镍底1.4um Min)

3) Mechanical(机械性能):

- 1) Force: 30 ± 10 gf per pin at 0.7mm stroke (力: 30 $\pm$ 10gf 的力: 30 $\pm$ 10gf)
- 2) Total stroke(总行程) : 1.00mm
- 3) Durability(寿命): 10,000 cycle min.

4) Electrical(电性能)

- 1) Contact resistance(接触阻抗): 30mOhm Max.
- 2) Voltage rating(额定电压): 36V DC Max
- 3) Current rating(额定电流): 2.0A

LOC					NAME						
-		NEW		2010/09/07	P060 PIN PG-1.4-1.3-1.25-3.5-5.0						
DIST		LTR	REVISION RECORD	APVD	DATE	REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT					
-						SCALE 1:1	A4	DWG NO.	C-101452	SHEET 1 OF 1	REV 1

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED	MATL	HT TR	FIN
0 = ±		—	
0.0 = ±0.10			
0.00 = ±0.05			
0.000 = ±			
0.0000 = ±			
	DWN	APVD	
	Qin		Top-Link
	REL		Electronics L.td.
			<i>Electronics</i>

101452-1	PART NUMBER
----------	-------------