



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101085

LOC	-
DIST	-

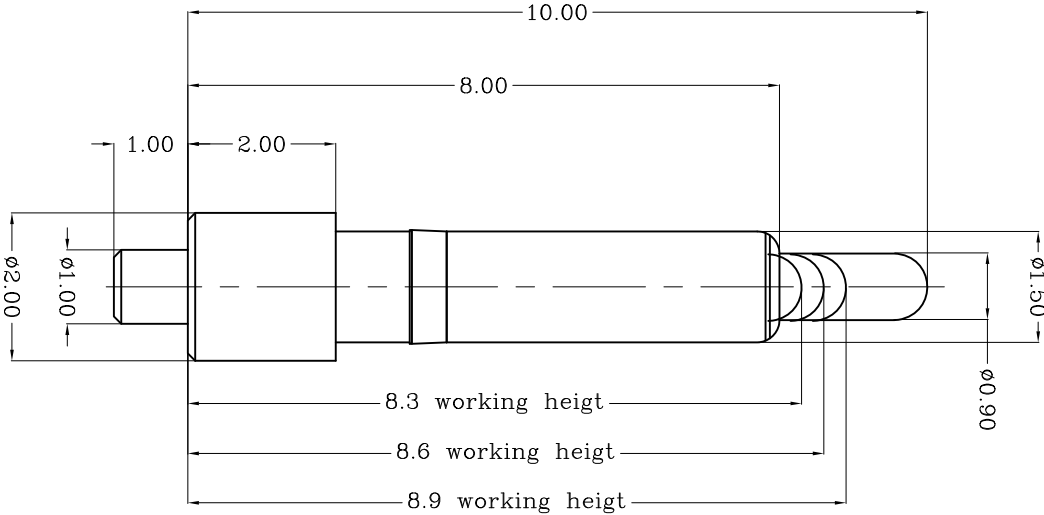

TOP-LINK

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: Min 0.4um Gold plating over min. 2.5um Nickle plating

3 Mechanical


1)Total stroke : 1.9mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

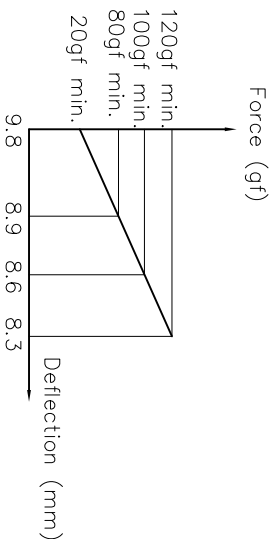

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±	-		0.0	= ±0.10		
0.00	= ±	-		0.000	= ±		
ANGLE:	±1°						
SURF TEXTURE:	3.2/						
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT							
MATL		HT TR		FIN			
DWN		APVD		Lansing		Top-Link Electronics Ltd.	
CHK		REL					
Andy							
NAME		POGO PIN					
SCALE		PG-1.0-1.0-2.0-2.0-1.5-8.0-10.0					
1:1		A4		DWG NO.		C-101085	
				SHEET		1 OF 1	
				REV		A	

101085-1
PART NUMBER

USED ON