


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:  
C-101152

DIST  
---  
---

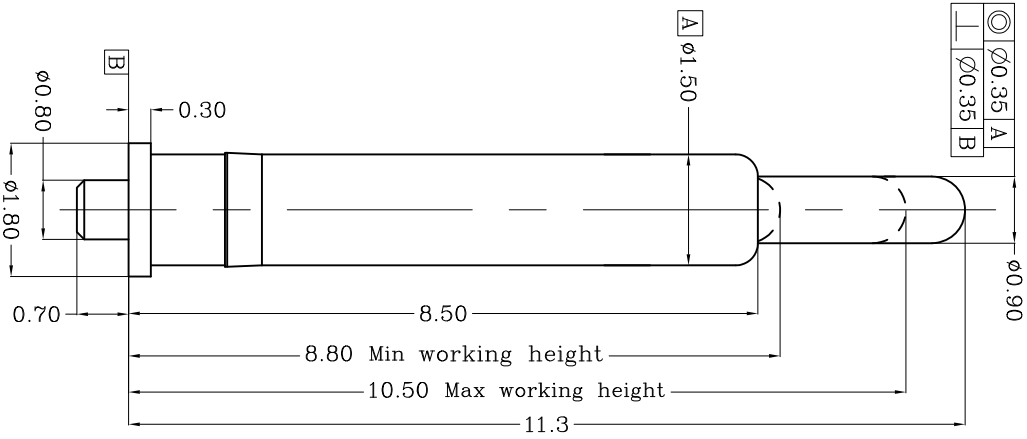


Table 1 Mechanical performance			
Max.working height	10.50mm	85±20gf	<3.1>
Min.working height	8.80mm	215±50 gf	
Durability		10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <3.1> force is the average of forces obtained when plunger goes downwards and upwards.
- <3.2>Warning: Working height are not permitted to be less than min working height.
- 3 Electrical performance
- Resistance: 50mOhm Max.
- Current rating: 2.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

TOP-LINK

Item	Part name	Qty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Gold plating over Nickel plating
2	Plunger	1	Leaded Brass	Gold plating over Nickel plating
3	Spring	1	Stainless steel wire	_____
4				
5				

Rev.	NEW	2011/03/24	Date.
Revision record.			

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight	101152-1
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	APVD:				PART NUMBER
0.0 = ±0.15	CHK:	REL:				
0.00 = ±0.10	Name	POGO PIN	PG-2.0-1.2-6.0-1.0-3.0-11.0-15.00			
0.000 = ±0.005	Scale	1:1	Size	A4	DWG No.	C-101152
Angle: ±1°	Page	1/1	Rev.	A		
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.						

Top-Link Electronics Ltd.