


Notes:
△ Material(材质):

- 1)Body : Brass
 - 2)Plunge : Brass
 - 3)Spring : Stainless steel wire
- 2 Plating(电镀):
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3 Mechanical(机械性能):
- 1)Force: 50±10gf per pin at 1.0mm stroke (力: 下压1.0mm的力: 50±10gf)
 - 2)Total stroke(总行程) : 1.30mm
 - 3)Durability(寿命): 10,000 cycle min.
- 4 Electrical(电性能)
- 1)Contact resistance(接触抵抗): 30mOhm Max.
 - 2)Voltage rating(额定电压): 36V DC Max
 - 3)Current rating(额定电流): 2.0A

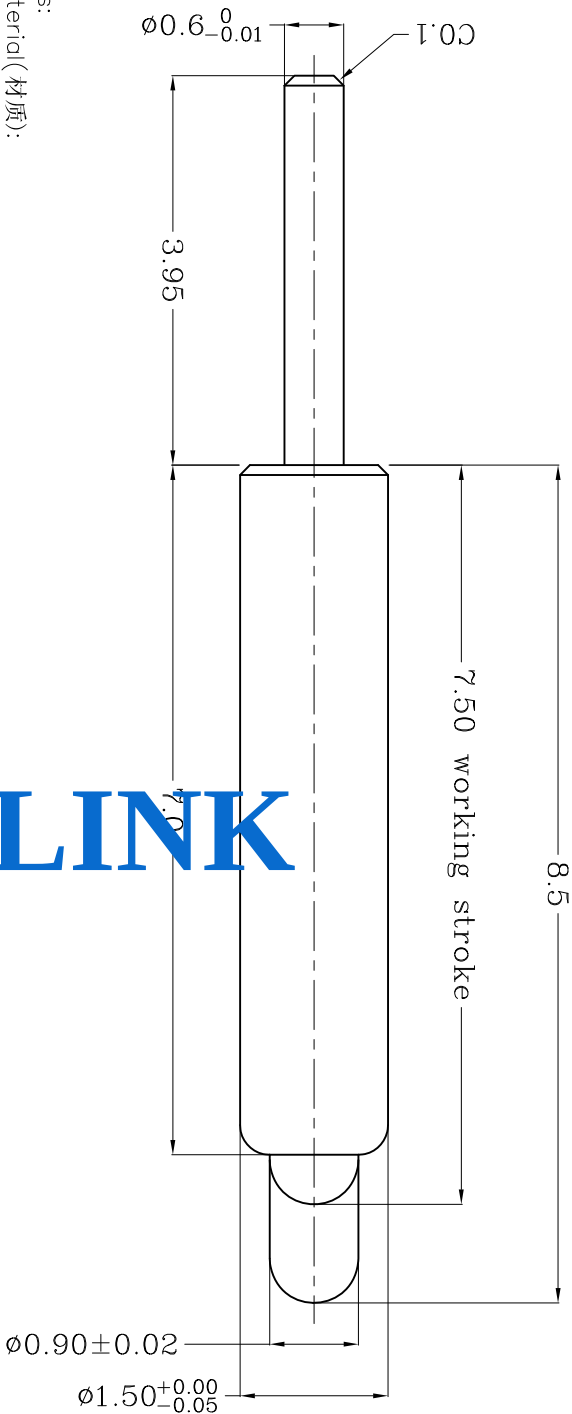

TOP-LINK

USED ON -

101190-1
PART NUMBER

Top-Link
Electronics Ltd.

M.Q.X.									
DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATL		HT TR		FIN	
0	= ±			DWN	APVD	Top-Link Electronics	Top-Link Electronics Ltd.	—	✓
0.0	= ±0.15			QIN					
0.00	= ±0.10			CHK					
0.000	= ±				REL				
ANGLE: ±1°				NAME					
SURF TEXTURE: 32/				POGGO PIN					
REMOVE BURRS, BREAK				PG-0.6-3.95-1.5-7.0-8.5					
SHARP EDGES R0.05 MAX				SCALE					
DD NOT SCALE PRINT				1:1		A4		DWG NO.	
				C-101190		SHEET 1 OF 1		REV C	