




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO. C-101219

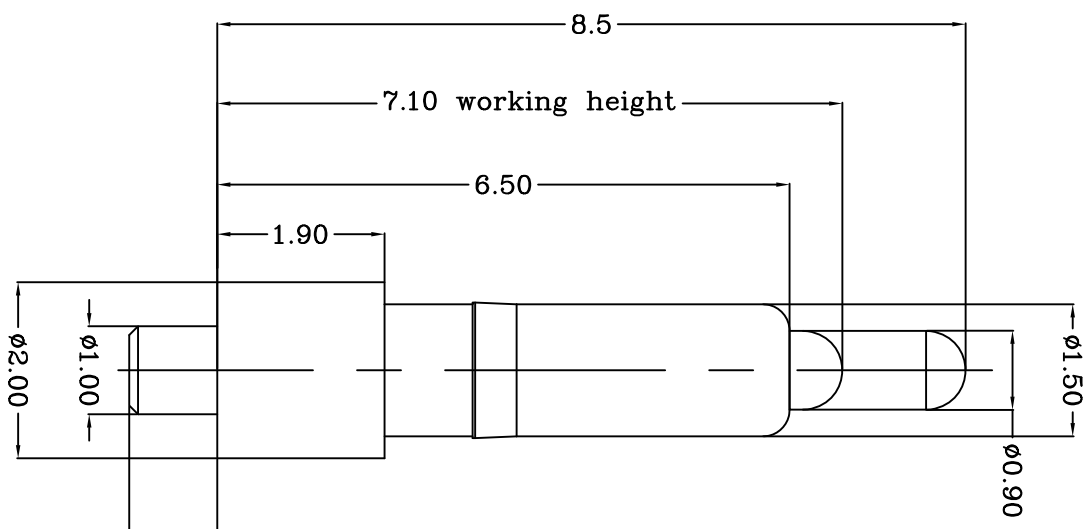

Recommended Solder paste thickness 1.10 mm
Recommended PCB Layout

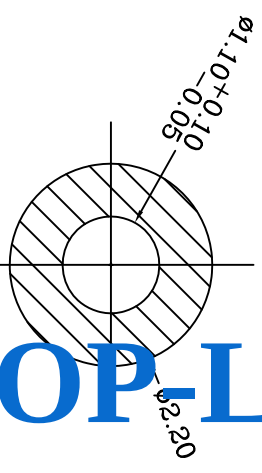

TOP-LINK

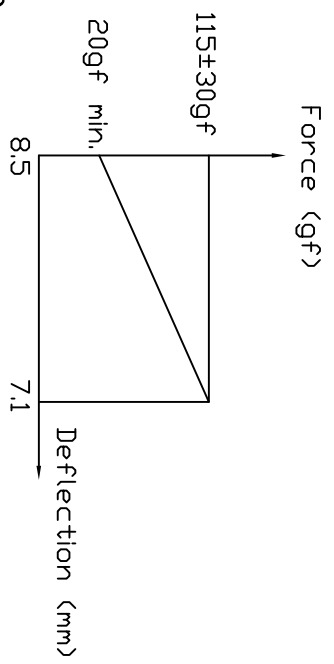

- Notes:
- Material:
- 1)Plunger & Body : Brass
 - 2)Spring : Stainless steel wire
 - 2 Plating
 - 1)Body: 0.1um Gold plating over min. 1.4um Nickle plating
 - 2)Plunger: 0.4um Gold plating over min. 1.4um Nickle plating
 - 3 Mechanical
 - 1)Total stroke : 1.9mm

USED ON -

LDC	-
DIST	-

LTR	NEW	08/07/27
REVISION		
RECORD		
APVD		
DATE		

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
NAME	PGGD PIN		
SCALE	1:1		
A4			
DWG			
NO.			
C-101219			
SHEET	1 OF 1		
REV	A		

MATL	1	HT TR	-	FIN	-
DWN	qin	APVD	Lansing		
CHK	Jin	REL			
Top-Link Electronics Ltd.					

101219-1

PART NUMBER

4

3

2

1

A

B

C

D