



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101244

LDC
-
DIST
-

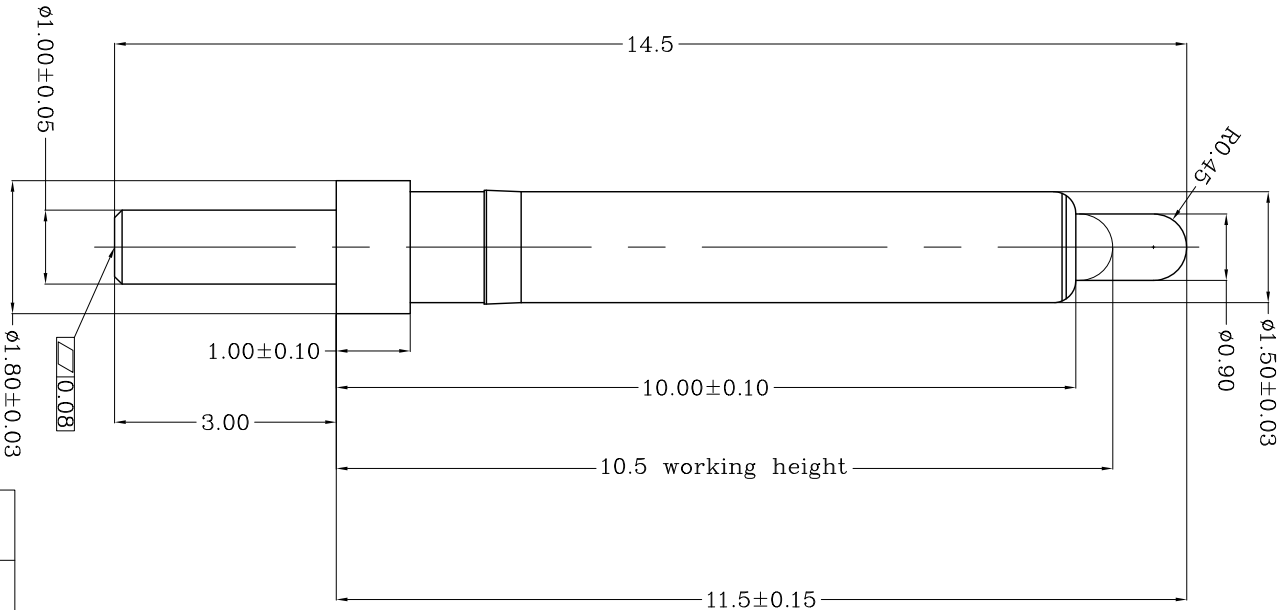

TOP-LINK

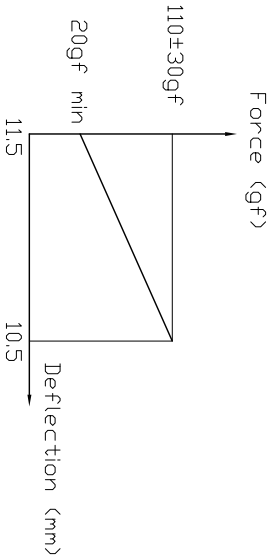

Notes:

Material:

1)Plunger & Body : Brass

2)Spring : Stainless steel wire

2 Plating

1)Body: 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: 0.4um Gold plating over min. 1.4um Nickle plating

3 Mechanical

1)Total stroke : 1.4mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

3)Operating temperature: -40°C to 100°C

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ± 0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN	qin	APVD	Lansing
CHK	Jim	REL	Top-Link Electronics Ltd.
NAME	POGGO PIN PG-1.0-3.0-1.8-1-1.5-10-11.5		
SCALE	1:1	A4	DWG NO. C-101244
			SHEET 1 OF 1
			REV A

USED ON

-

101244-1

PART NUMBER