




LDC
-
DIST
-

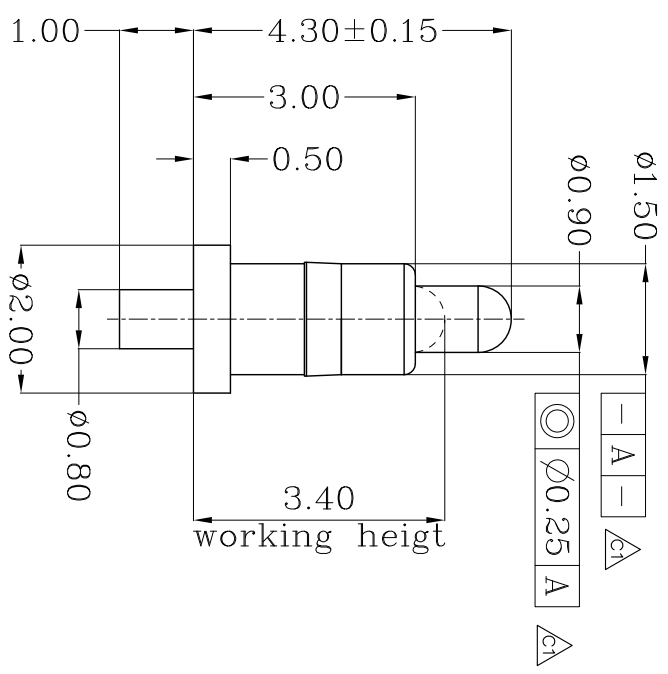

Recommended PCB Layout

TOP-LINK

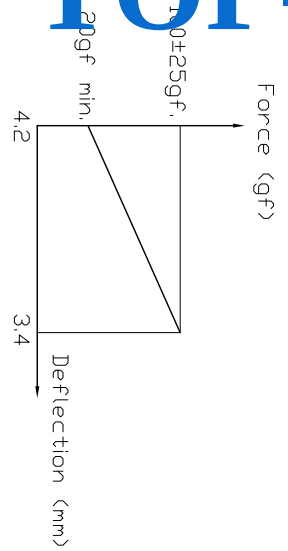

- Notes:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2.
 - 2)Spring : Stainless steel wire

- 2 Plating
 - 1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
 - 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating
- 2 Mechanical
 - 1)Total stroke : 1.2mm
 - 2)Durability: 10,000 cycle min.
- Electrical
 - 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC

C1	Update	121231
C	pp 加长	080919
B	Add body length	080901
A	NEW	080813
L TR	REVISION RECORD	APVD DATE

DIMENSIONS IN MM			TOLERANCES UNLESS OTHER SPECIFIED		
0	= ±	121231	0.0	= ±0.15	
0.0	= ±0.10	080919	0.00	= ±	
0.000	= ±	080901	ANGLE: ±1°		
SURF TEXTURE: 32/			REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX		
DO NOT SCALE PRINT					
MATL	1	HT TR	—	FIN	—
DWN	Qin	APVD			
CHK		REL			
NAME			POGDO PIN		
SCALE	1:1	A4	DWG NO.	C-101257	
			SHEET	1 OF 1	REV
					C1

Top-Link Electronics Ltd.

101257-1
PART NUMBER

USED ON