


DWG NO.
C-101409

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

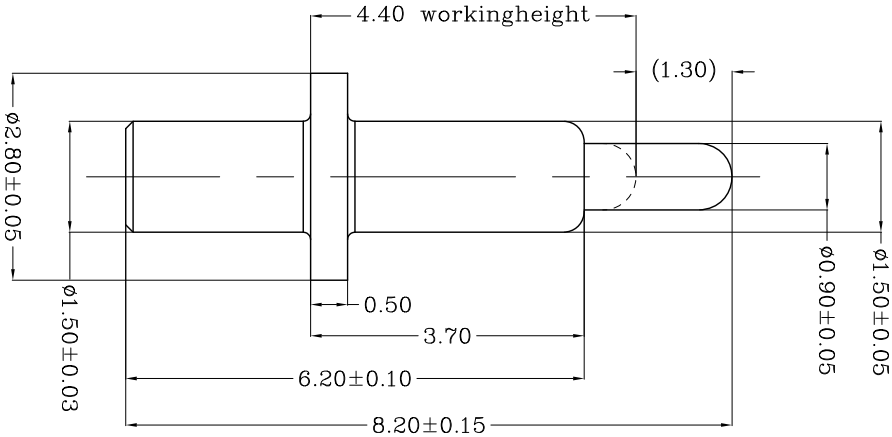

Notes:
△ Material(材质):

1)Body : Brass

2)Plunge : Brass

3)Plating : Stainless steel wire
2)Plating(电镀):

1)Body: 0.1um Gold plating over 1.4 Nickel plating
(Body: 镀金0.1um 镍底1.4um)

Plunger: Min 0.4um Gold plating over 1.4um Nickel plating
(Plunger: 镀金0.4um 镍底1.4um)

3)Durability(机械性能):

1)Force: 110±25gf per pin at 1.3mm stroke
(力: 下压1.3mm的力: 110±25gf)

2)Total stroke(总行程) : 2.00mm

3)Durability(寿命): 10,000 cycle min.

4)Electrical(电性能)

1)Contact resistance(接触抵抗): 30mOhm Max.

2)Voltage rating(额定电压): 36V DC Max

3)Current rating(额定电流): 2.0A

TOP LINK

USED ON

-

101409-1
PART NUMBER

MATL	HT TR	FIN
△ 1	—	— ✓

DWN	APVD	Top-Link Electronics L.td.
Qin		
CHK	REL	

NAME	PGGD PIN
PG-1.5-2.5-2.8-0.5-1.5-6.2-8.2	

SCALE	A4	DWG NO.	C-101409	SHEET 1 OF 1	REV 2
1:1					

REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX
DD NOT SCALE PRINT

SURF TEXTURE: 32/
ANGLE: ±1°

TOLERANCES UNLESS OTHER SPECIFIED
0 = ±
0.0 = ±0.10
0.00 = ±0.05
0.000 = ±

修改电镀规格

NEW

DATE	APVD	REVISION RECORD	L TR
2010/07/02			
2009/12/10			

4

3

2

1