



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101437

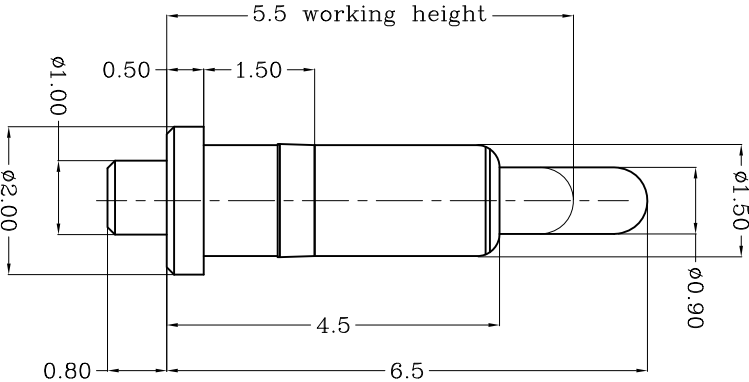

Notes:
△ Material(材质):

- 1) Body : Brass
- 2) Plunger : Brass
- 3) Solenoid : Stainless steel wire
- 4) Plating(电镀):
 - 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3 Mechanical(机械性能):
 - 1) Force: 135±25gf per pin at 1.0mm stroke (压力: 1.0mm 的力: 135±25gf)
 - 2) Total stroke(总行程) : 1.20mm
 - 3) Durability(寿命): 10,000 cycle min.
 - 4) Electrical(电性能)
 - 1) Contact resistance(接触抵抗): 30mOhm Max.
 - 2) Voltage rating(额定电压): 36V DC Max
 - 3) Current rating(额定电流): 2.0A

TOP-LINK

USED ON

-

101437-1

PART NUMBER

MATL	HT TR	FIN
△	—	—

DWN	APVD	Top-Link Electronics Ltd.
△		

CHK	REL	Top-Link Electronics

NAME	PGGD	PIN
	PG-10-0.8-2.0-0.5-1.5-4.5-6.5	

SCALE	A4	DWG	C-101437	SHEET	REV
1:1		NO.		1 OF 1	1

DIMENSIONS IN MM
TOLERANCES UNLESS OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

NEW	REVISION RECORD	DATE

LDC	DIST
-	-

4

3

2

1