


DWG NO.
C-101445

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

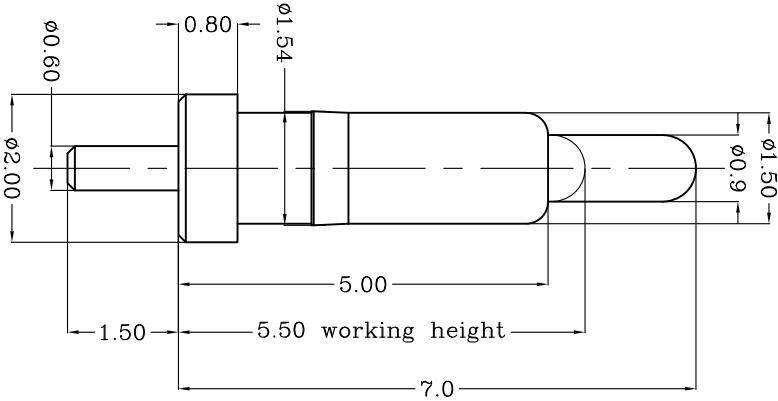

Notes:
△ Material (材质):

1) Body: Brass

2) Plunger: Brass

3) Spring: Stainless steel wire

2 Plating (电镀):

1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Bottom: Min 0.1um Min 镍底1.4um Min)

2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mech (机械性能):

1) Force: $80 \pm 35gf$ per pin at 1.5mm stroke

(力: 下压1.5mm的力: $80 \pm 35gf$)

2) Total stroke (总行程): 1.90mm

3) Duration (寿命): 10,000 cycle min.

4 Electrical (电性能)

1) Contact resistance (接触阻抗): 30mOhm Max.

2) Voltage rating (额定电压): 36V DC Max

3) Current rating (额定电流): 2.0A

USED ON

-

101445-1

PART NUMBER

DIMENSIONS IN MM		TOLERANCES UNLESS OTHER SPECIFIED	
0	= ± -	0.0	= ±0.15
0.00	= ±0.10	0.000	= ± -
ANGLE: ±1°		SURF TEXTURE: 3.2/	

Top-Link
Electronics Ltd.

NAME
POGO PIN

REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

SCALE	A4	DWG NO.	C-101445	SHEET 1 OF 1	REV B
-------	----	---------	----------	--------------	-------

更新		2010/12/22
NEW		2010/06/30
REVISION RECORD	APVD	DATE
LTR		

4

3

2

1