



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101498

proposal

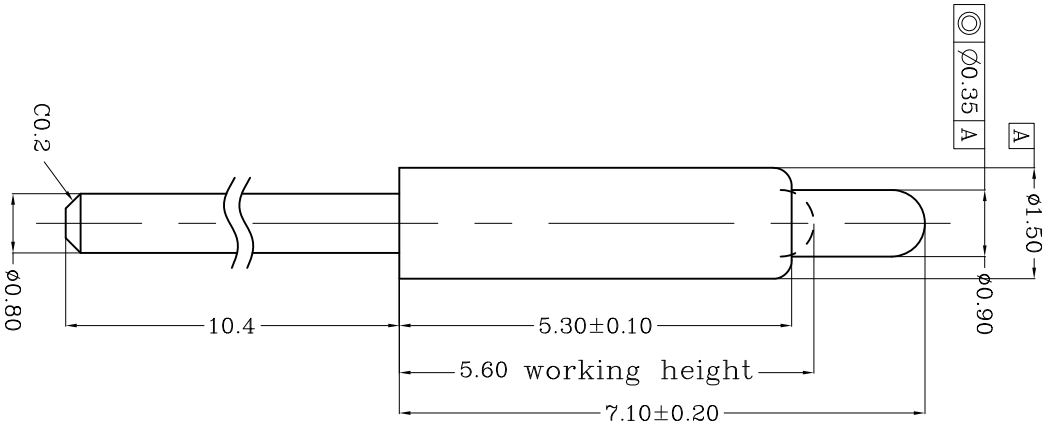

Not

1 Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<3> The force is the average of forces obtained when plunger goes downwards and upwards.

3 Electrical performance

Resistance: 50mOhm Max.Current rating: 2.0A

4 Packaging Spec.Comformance to EIA 481

5 Reuse complaint.

Table 1 Mechanical performance		
working height	5.60mm	40±10gf <3.1>
Durability	20000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	0.1um Au over 1.4um Ni
2	Plunger	1	Leaded Brass	0.4um Au over 1.4um Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Top-Link Electronics Ltd.		Type	Unit		Weight
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm		
0.0 = ± 0.15	DWN:	APVD:			
0.00 = ± 0.10	CHK:	REL:			
0.000 = ± 0.05	Angle: ± 1°				
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.IDO NOT SCALE PRINT.		Name	POGO PIN PG-0.8-10.4-1.5-5.3-7.1		
Scale 1:1	Size A4	DWG No.	C-101498		
		Page 1/1	Rev. A		
		PART NUMBER 101498-1			

Top-Link Electronics Ltd.