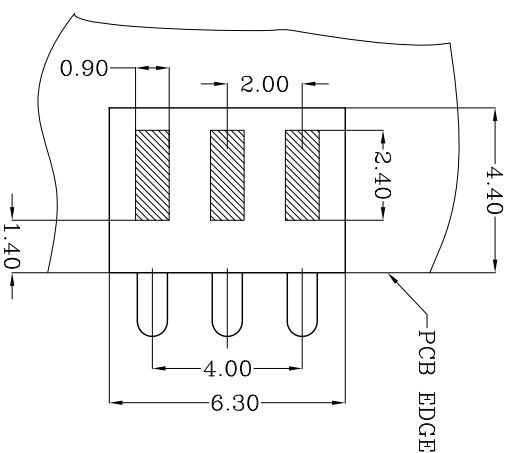
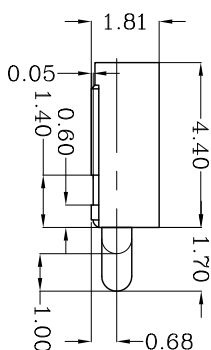
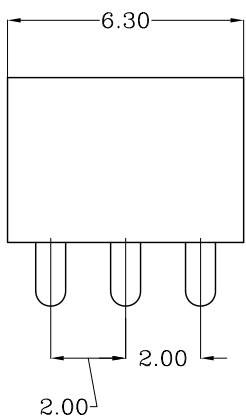



Recommended PCB Layout & Application

10001-3

2 Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 鍍金0.1um Min 鍍底: .4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 鍍金0.4um Min 鍍底1.4um Min)

3 Mechanical:
Spring force: Min 0.2N with 0.3mm stroke

1.1 +0.30N/−0.20N with 1.0mm stroke
Total stroke(总行程): 1.40mm
Durability(寿命): 10,000 cycle min.

LDC	-
DIST	-

	變更材質		2010/05/12
	改BDDY結構		2010/01/25
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM		MATERIAL		FIN	
TOLERANCES UNLESS OTHER SPECIFIED		HT TR		—	
0 = ±		DWN		APVD	
0.0 = ±0.15		QIN		REL	
0.00 = ±0.10		CHK		REL	
0.000 = ±					
ANGLE: ±1°					
SURF TEXTURE: 32/		NAME		BATTERY	
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX		POD CONNECTOR		3 POSITIONS RIGHT ANGLE	
DO NOT SCALE PRINT		SCALE		PGC-1.36-6.1-RA-3P-2.0PH	
		1:1		A4	
		DWG NO:		C-1000001	
		SHEET		REV	
		1 OF 1		F	

1000001-3	PART NUMBER
-----------	-------------