







THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
100257



Notes:
Material(材质):
Housing: LCP Color Black.
Contact: Brass
Spring : Stainless steel wire


2 Plating:

- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镀底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镀底1.4um Min)


3 Mechanical:

Spring force: Min 20gf with 0.3mm stroke
110 $\pm$ 30gf with 1.0mm stroke.
Total stroke(总行程): 1.40mm
Durability(寿命): 10,000 cycle min.

TOP-LINK

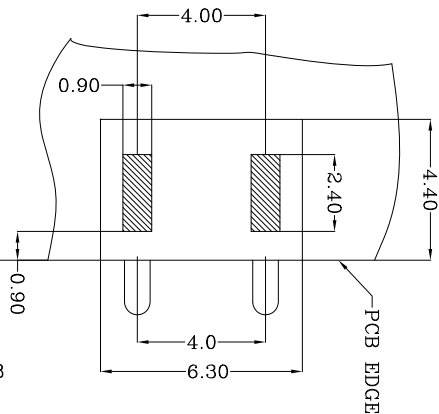

Application status 1
焊锡膏, 推荐锡膏厚度为0.10mm
IMPORTANT: The recommended thickness of solder paste is 010mm



Application status 2
Recommended PCB Layout & Application

LDC
-
DIST
-

变更材质		2010/05/12
NEW		2009/01/15
L TR	REVISION RECORD	APVD DATE

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.10		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	HT TR	FIN	PART NUMBER
DWN	APVD		100257-2
CHK	REL		
Top-Link Electronics Ltd.			
NAME PG02 CONNECTOR 2 POSITIONS RIGHT ANGLE			
PGC-1.36-6.1-RA-2P-4.0PH			
SCALE	DWG	SHEET	REV
1:1	A4	1 OF 1	B

USED ON

-