
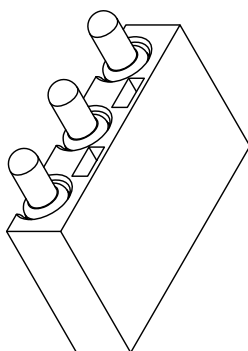
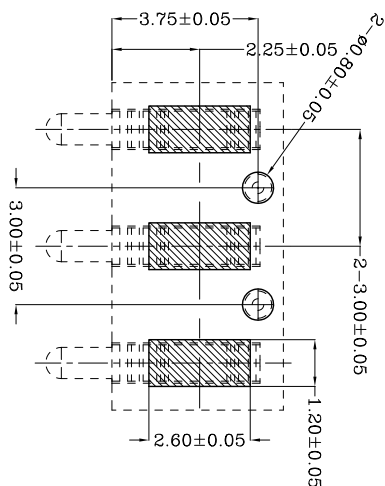


proposal



Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp. Plastic UR94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5				

Table 2 Mechanical performance

Table 2 Mechanical performance		
working Stroke	1.00mm	120±25gf
Durability	10,000 cycle	

 $\frac{1}{2}$

1 Dimensions shall be interpreted per ASME Y14.5M-1994.

2 Mechanical performance(See the table 2)

 The force is the average of forces obtained when plunger goes downwards and upwards.

Warning: working stroke are not permitted to be larger than Max working stroke.

3 Electrical performance

Resistance: 30mOhm Max.;

Current: 2A DC

4 Packaging specification conforms to EIA 481

5 RoHS compliant.

100557-3
PART NUMBER

		Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	
B1	增加位置度标注	2013/03/26	TOLERANCES UNLESS OTHER SPECIFIED	DRAWN: Cai wanlu	APVD:			Top-Link <i>Electronics</i>	Top-Link Electronics Ltd.
B	变更弹力规格	2009/11/05	0.0 = ± 0.15 0.00 = ± 0.10 0.000 = ± 0.10	CHK:	REL:				
A	NEW	2009/10/09	Angle: ±1° SURF: TEXTURE: REMOVE BURRS: BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT.	Name Pogo pin connector					
Rev.	Revision record.	Date.		Scale 1:1	Size A4	DWG No.	C-100557	Page 1/1	Rev. B1