


DWG NO. C-100583

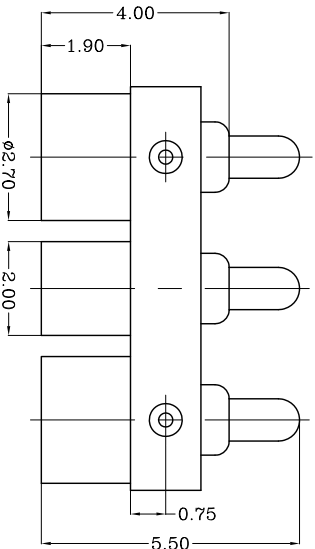

Recommended P.C.B.
layout (Component Side)

100583-3
PART NUMBER

TOP-LINK

Housing: PA 4.6 (30% Glass Filled) Color Black.

Contact: Brass
Spring : Stainless steel wire

Plating:

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 鍍金0.1um Min 鍍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 鍍金0.4um Min 鍍底1.4um Min)

Mechanical:

Force: 130 ± 30 gf per pin at 1.0mm(力: 130 ± 30 gf)

Total stroke(总行程): 1.40mm

Durability(寿命): 10,000 cycle min.

4 Electrical (电性能)

Contact resistance(接触抵抗): 30mOhm Max.

Voltage rating(额定电压): 36V DC Max

Current rating(额定电流): 2.0A

USED ON

100583-3

PART NUMBER

top-link
Electronics

Top-Link
Electronics Ltd.

NAME BATTERY CONNECTOR 3 POS. RIGHT ANGLE

PGC-1.5-5.5-RA-3P-2.8PH

11

4

NO.

C-100583

1 OF 1

w