

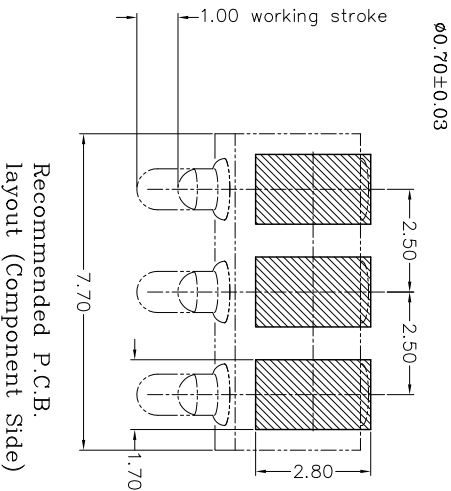
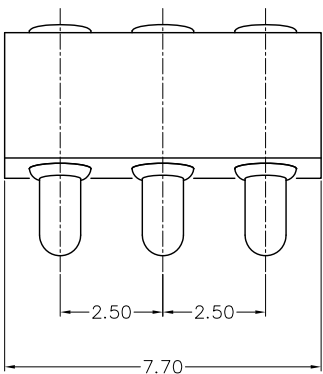
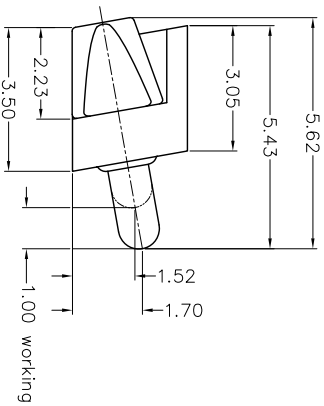


DWG NO.
C-100609

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK ELECTRONICS FACTORY

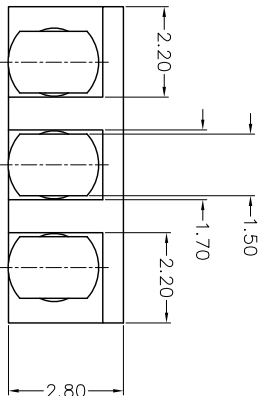

TOP-LINK

- Notes:
- 1 Material, Housing: PA 4.6 (30% Glass Filled)
Color Black. (UL94V-0)
Contact: Brass
 - 2 Mechanical demands:
Spring force: 130 $\pm$ 25 with 1.0mm stroke.
Full stroke: 1.5mm
Plating plunger: Min 0.4um Au over 1.4um Ni
Plating body: Min 0.1um Au over 1.4um .

LOC	-
DIST	-

	去指定性		2010/06/11
	変更结构		2010/06/10
	NEW		2010/06/07
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = $\pm$
0.0 = ± 0.10
0.00 = ± 0.10
0.000 = $\pm$
ANGLE: $\pm 1^\circ$
SURF TEXTURE: $\sqrt{3.2}$
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN
DWN	APVD	Top-Link
CHK	REL	Electronics
NAME	BATTERY CONNECTOR 3 POS. WITH PILLAR	Top-Link
SCALE	1:1	PGC-1.5-5.5-RA-3P-2.5PH
A4	DWG NO.	C-100609
SHEET	1 OF 1	REV 3

USED ON

-

100609-3

PART NUMBER

Top-Link
Electronics Ltd.