
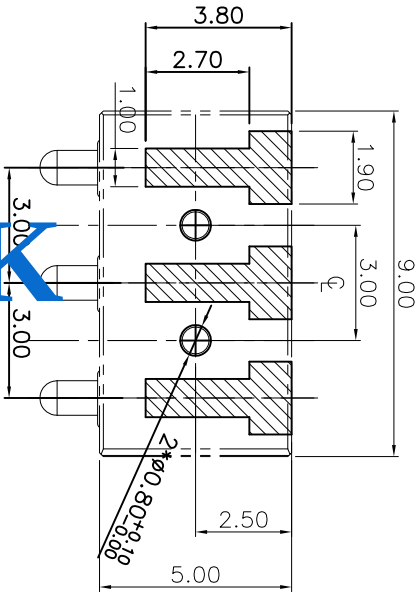
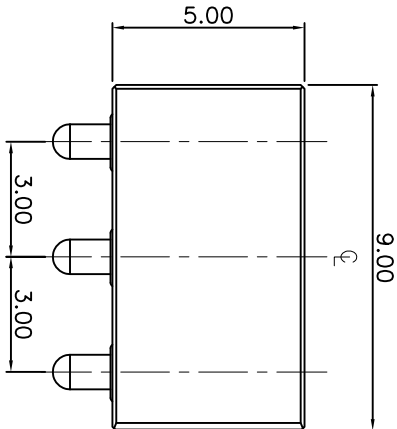

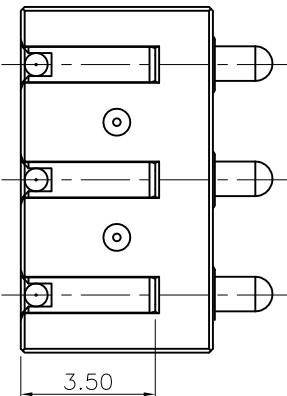
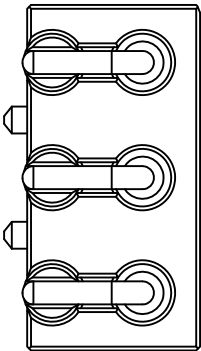
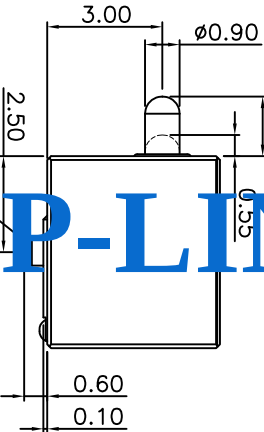


RECOMMENDED P.C.B. LAYOUT (Component Side)

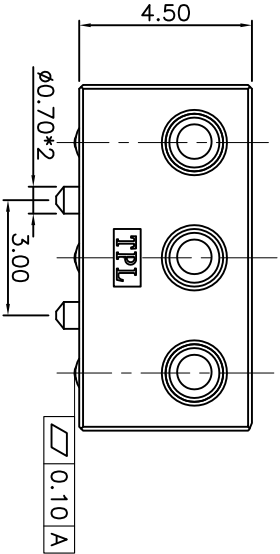

Notes:

1 Material, Housing: High temp. Plastic

Contact: Brass

2 Mechanical demands:

Plating Plunger: Min 0.4um Au over 1.4um Ni

Plating Body: Min 0.1um Au over 1.4um Ni .

3 Mechanical:

Total stroke: 1.50mm

Durability: 10,000 cycle min.

4 Electrical

Contact resistance: 30mOhm Max.

Voltage rating: 36V DC Max

Current rating: 2.0A

TOP-LINK

USED ON

100634-3

PART NUMBER

FIN — ✓

Top-Link Electronics Ltd.

NAME P0GD 3P Connector PGC-1S-5S5-RA-3P-3.0PH-3.0H

SCALE 4:1 A4 DWG NO. C-100634 SHEET 1 OF 1 REV B

REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DD NOT SCALE PRINT

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED

0.00 = ±0.15

0.00 = ±0.10

0.000 = ±

ANGLE: ±1°

SURF TEXTURE: 32/

SHARP EDGES R0.05 MAX

变更焊接端子

NEW

REVISION

RECORD

APVD

DATE

3

4

A

B

C

D