
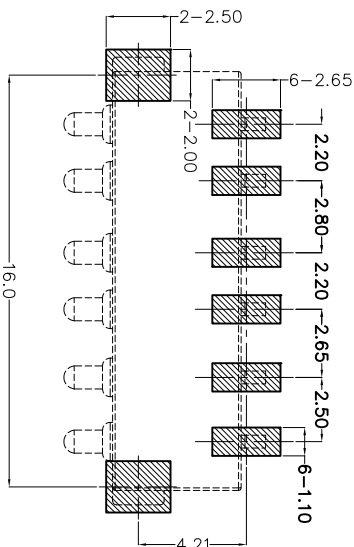
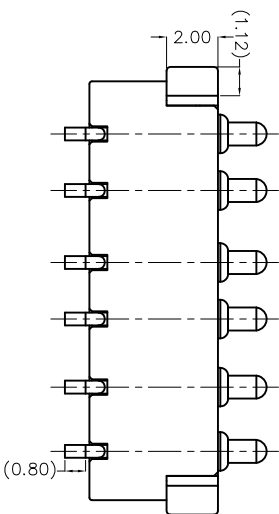
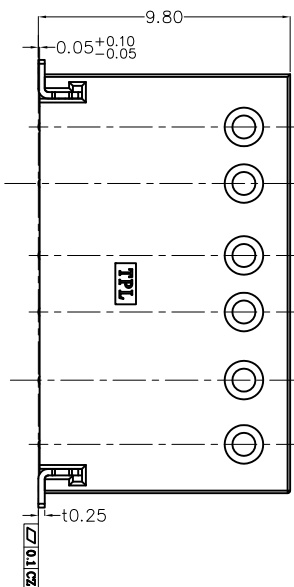


[illegible]

Recommended P.C.B layout (Component Side)

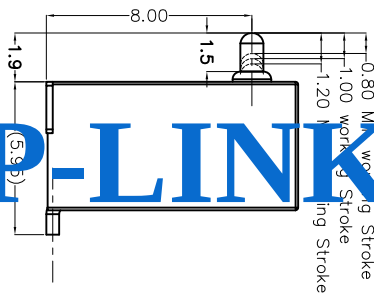

TOP-LINK

Notes:
1 Dimensions shall be interpreted per ASME Y14.5M-1994.

2 Mechanical performance (See the table 2)
 <2.1>The force is the average of 10 forces obtained when plunger goes downwards and upwards.

<2.2>Warning: Working Stroke are not permitted to be larger than Max working Stroke.

3 Electrical performance

Resistance: 30mOhm Max.; Current: 2A DC

4 Packaging Spec.

5 Working temperature $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$ and storing temperature $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$
6 RoHS compliant.

Item	Part name	Q'ty/ Ea'	Material	Finish
1	HSG	1	High temp.Prostic UL94 -V-0 Color Black	_____
2	Body	6	Leaded Brass	Min Au 1.0um over min Ni 1.4um
3	Plunger	6	Leaded Brass	Min Au 1.0um over min Ni 1.4um
4	Spring	6	Stainless steel wire	_____
5	latch	2	Brass	Stannum plating over Nickel plating

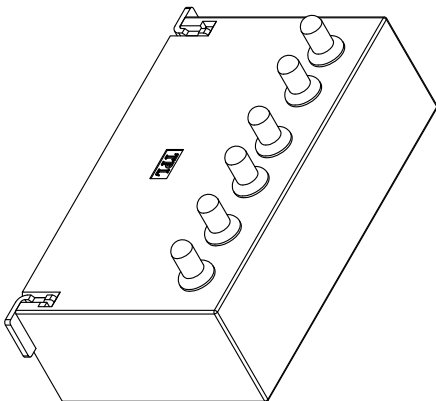


Table 2 Mechanical performance

Min.working Stroke	0.80mm	Min 90gf <2.1>
working Stroke	1.00mm	120±25gf <2.1>
Max.working Stroke	1.20mm	150±30gf <2.1>
Durability	10000 cycle	

100722-6
PART NUMBER

Type	Unit	mm
Customer drawing		

DWN:	APVD:	<i>top-link</i> Electronics Top-link Electronics Ltd
JERRY		
CHK:	REL:	

▷

Name _____

Customer drawing _____

Scale 1:1	Size A4	DWG No. C-100722	Page 1/1	Rev. 3.1
--------------	------------	---------------------	-------------	-------------