
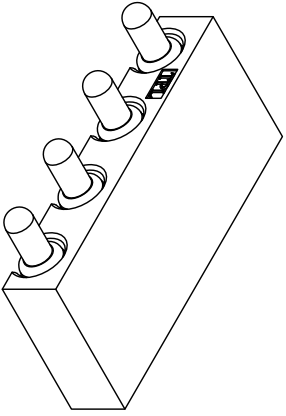
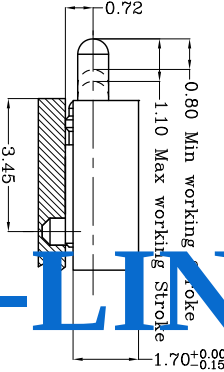
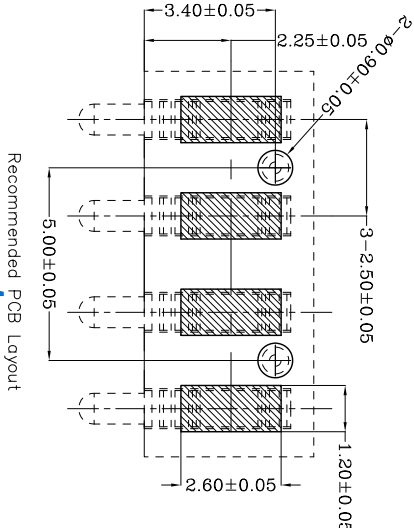
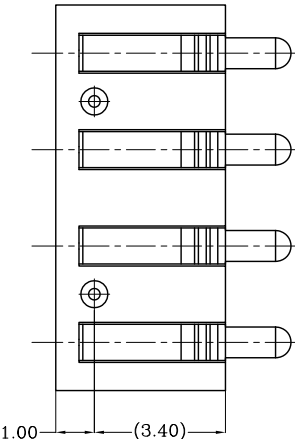
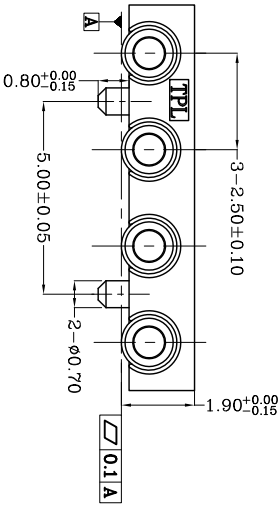


proposal

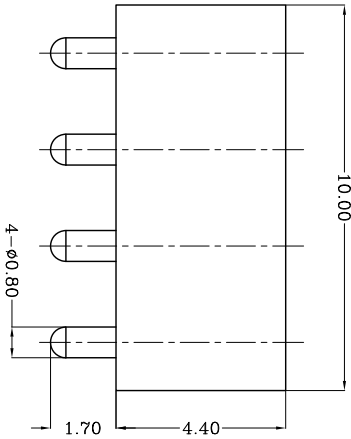

Item	Part name	Qty/Ed	Material	Finish
1	HSG	1	High Temp Plastic UL94 V-0 Color Black	_____
2	Body	4	Leaded Brass	Gold plating over Nickel plating
3	Plunger	4	Leaded Brass	Gold plating over Nickel plating
4	Spring	4	Stainless steel wire	_____
5				

Table 2 Mechanical performance			
The Min.working Stroke	0.80mm	80gf min<2.1>	
The Max.working Stroke	1.10mm	160gf max	
Durability		10000 cycle	

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M-1994.
 - 2 Mechanical performance(See the table 2)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2>Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.; Current: 2A DC
 - 4 Packaging Spec.
 - 5 RoHS compliant.

TOP-LINK

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Customer drawing	mm	100760-4	
0.0 = ± 0.15		CHK:	Qin Zuozhong			
0.00 = ± 0.10		REL:				
0.000 = ± 0.05		Name		Customer drawing		
SURF. TEXTURE:		APVD:				
REMOVE SHARP EDGES		REL:				
BREAK SHARP EDGES		APVD:				
R0.05 MAX DO NOT		REL:				
SCALE PRINT.		APVD:				

Rev.	NEW	2012/04/27
Revision record.		Date.

DIST
