
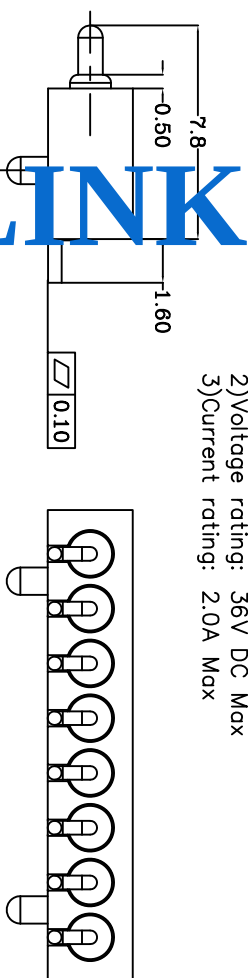


DWG NO. C-110414

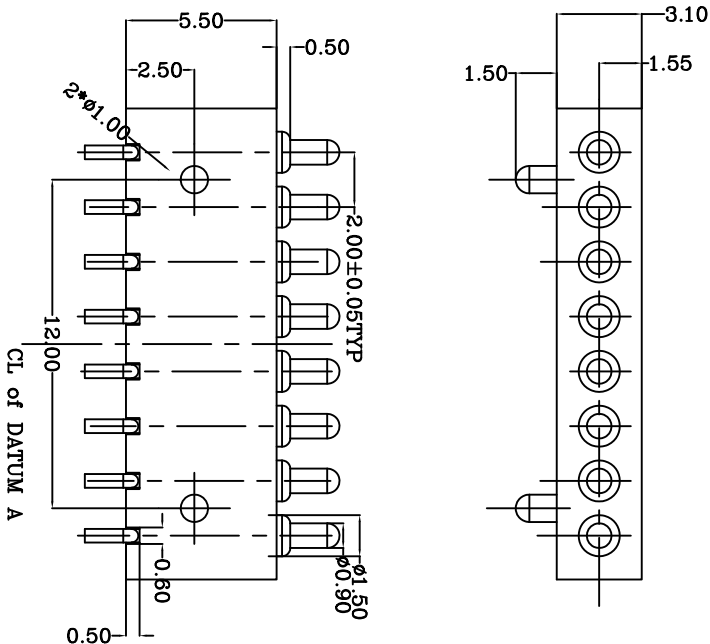

- Notes:
- 1 Material, Housing: PA 46 Color Black.
Contact: Brass
- 2 Mechanical demands:
Plating Plunger: Min. 0.4 μ m Au over 1.4 μ m Ni
Plating Body: Min. 0.1 μ m Au over 1.4 μ m Ni.
- 3 Mechanical
1) Force: 50 $\pm$ 25gf per pin at 1.0mm stroke
2) Total stroke : 1.60mm
3) Durability : 10,000 cycle min.
- 4 Electrical
1) Contact resistance: 30m Ω m Max
2) Voltage rating: 36V DC Max
3) Current rating: 2.0A Max

USED ON

RECOMMENDED P.C.B LAYOUT

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0	=	$\pm$
0.0	=	± 0.15
0.00	=	± 0.10
0.000	=	$\pm$
ANGLE:		$\pm 1^\circ$

SURF TEXTURE: 3.2/
REMOVE BURRS. BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	
------	---

DWN
QIN
CHK
JIN

NAME	BAT
SCALE	1:1

HT TR
—

using

C-110.

FIN	A-
-----	----

Top-Link
Electronics

CONNECTOR 8 POSITIONS P-2.0PH	SHEET 1 OF 1	REV A
----------------------------------	-----------------	----------

110414-8

PART NUMBER

1

Top-Link
Electronics

Top-Link
Electronics Ltd.

JECTOR 8 POSITIONS
P-2.0PH

14	SHEET 1 OF 1	REV A
----	-----------------	----------

4

၆

2

1