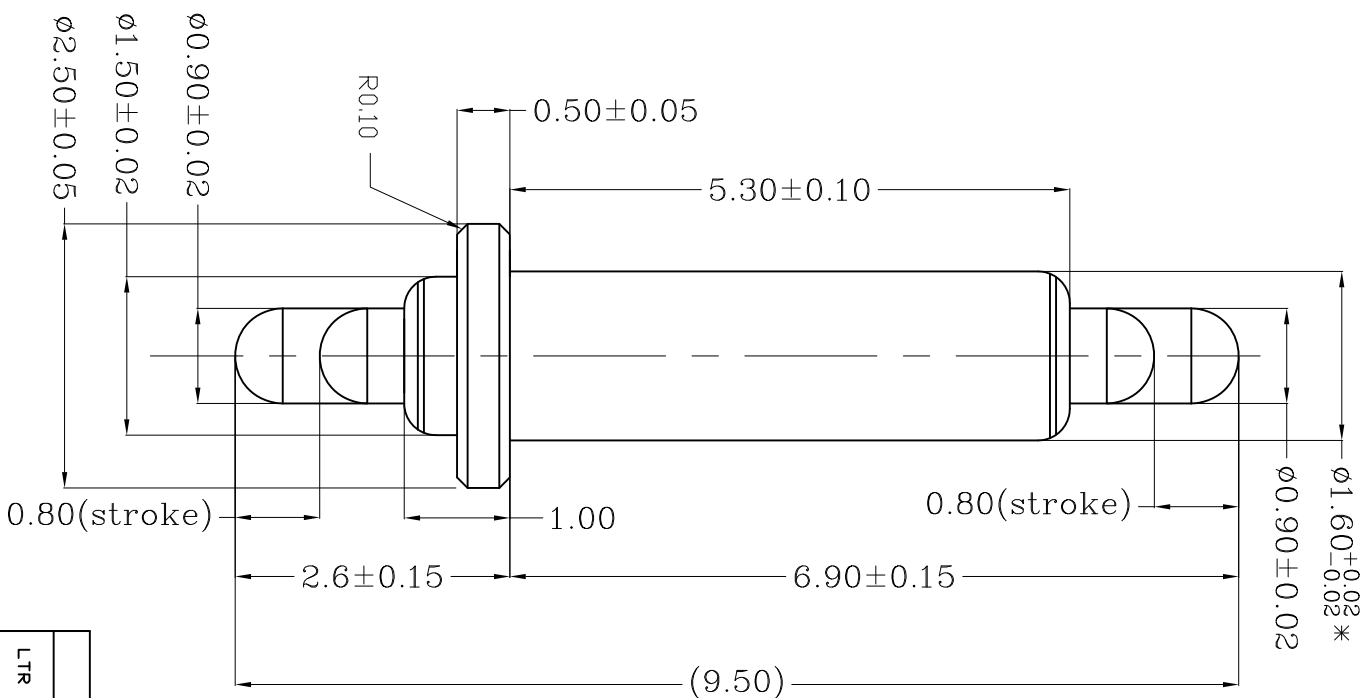


Notes: Material:

- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
- 2)Spring : Stainless steel wire
- 2 Plating
 - 1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
 - 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating
3. Mechanical
 - 1)Total stroke : 1.2&1.2mm
 - 2)Durability: 10,000 cycle min.
4. Electrical
 - 1)Contact resistance: 50mOhm Max.
 - 2)Operating voltage: 20VDC MAX.

LDC	-
DIST	-

	NEW		11/07/00
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM				MATERIAL		HT TR		FIN	
TOLERANCES UNLESS OTHER SPECIFIED				1		—		✓	
0	= ±	DWN	APVD	<i>Top-Link Electronics</i>		Top-Link Electronics Ltd.			
0.0	= ±0.15	QIN	Lansing						
0.00	= ±0.10	CHK	REL						
0.000	= ±	JIM							
ANGLE: ±1°									
SURF TEXTURE: 32/				POGO PIN					
REMOVE BURS, BREAK				PG-1.5-0.5-2.5-0.5-1.5-6.3-9.5-2P					
SHARP EDGES R0.05 MAX									
DO NOT SCALE PRINT									
SCALE		A4	DWG NO.	C-101238		SHEET		REV	
1:1						1 OF 1		A	

101238-1
PART NUMBER

USED ON