


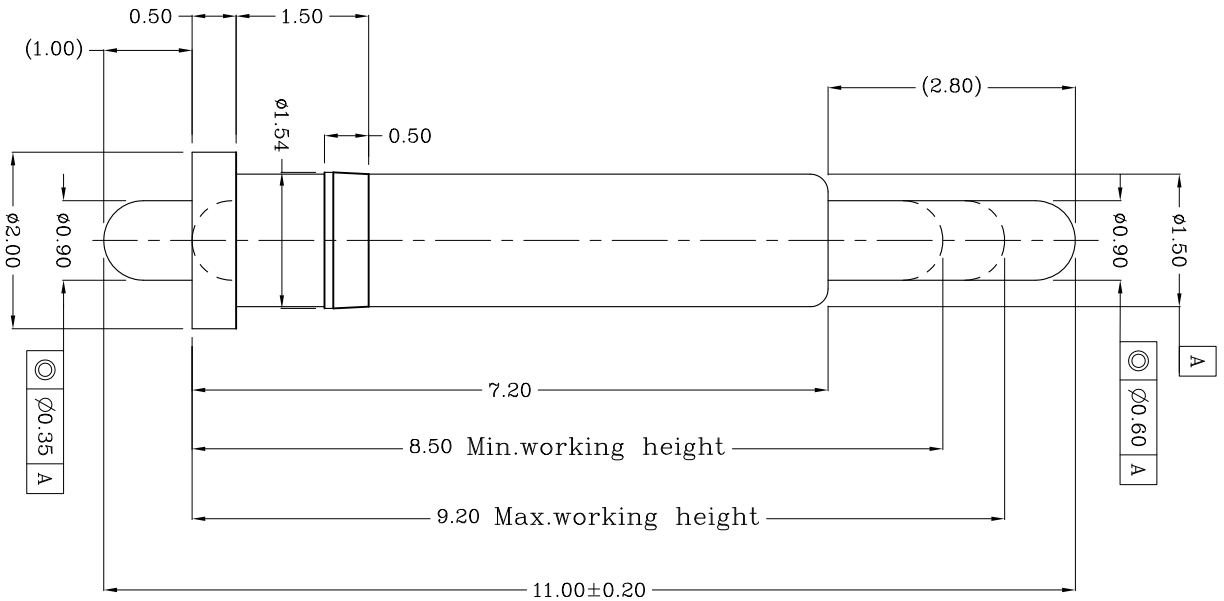

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 Electrical performance
- 4 RoHS compliant.

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	2	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	
4				
5				

Table 1 Mechanical performance			
Max.working height	9.20mm	80gf min<2.1>	
Min.working height	8.50mm	200gf max	
Durability	10000cycle		

Top-Link Electronics Ltd. TOLERANCES UNLESS OTHER SPECIFIED 0.0 = ±0.15 0.00 = ±0.10 0.000 = ±0.005 SURF. TEXTURE: REMOVE BURRS: BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.	Type	Customer drawing	Unit	mm	Weight	
	DWN:	Gui zhiguo	APVD:		Top-Link Electronics	Top-Link Electronics Ltd.
	CHK:		REL:			
	Name			POGO PIN		
	Scale	Size	DWG No.	Page		
	1:1	A4	C-101595	1/1	2	