



proposal

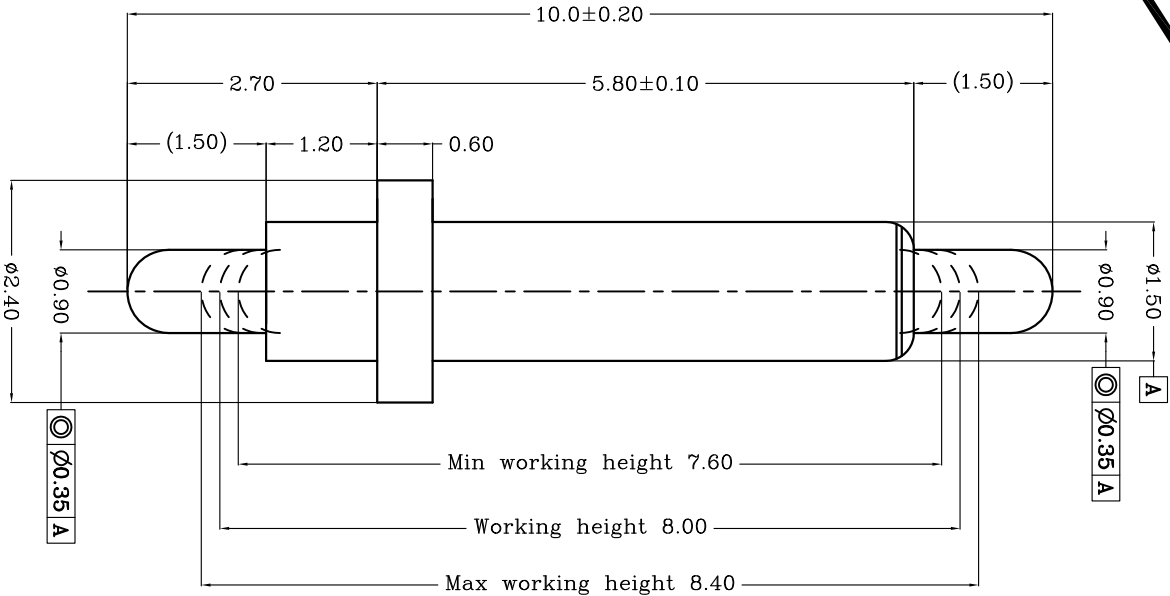


Table 1 Mechanical performance		
working height	8.00mm	80±20gf <2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um Min. over Ni 1.4um Min.
2	Plunger	2	Leaded Brass	Au 0.4um Min. over Ni 1.4um Min.
3	Spring	1	Stainless steel wire	_____
4				
5				

TOP LINK

- Not
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2> Warning: Working height are not permitted to be less than the working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.
 - Current rating: 2.0A
 - 4 RoHS compliant.

1	NEW	2016/02/01
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Minos	APVD:	<u>Topo-Link</u> <u>Electronics</u>	
0.0 = ±0.15		CHK:		REL:	Top-Link Electronics Ltd.	
0.00 = ±0.10		POGO PIN				
0.000 = ±						
Angle: ±1°						
SURF. TEXTURE: REMOVE BURRS.						
BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT.		Scale	Size	DWG No.	C-20101011339	Page 1/1
		1:1	A4			Rev. 1

20101011339	PART NUMBER
-------------	-------------