


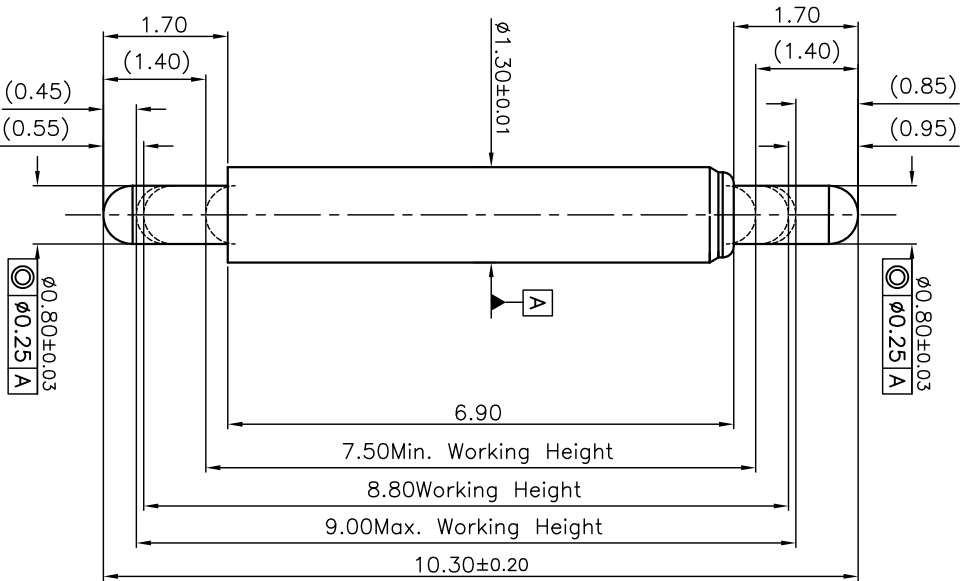

TOP-LINK

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards
 - <2.2>Warning:Working height are not permitted to be less than Min working height
 - 3 Electrical performance
 - <3.1>Current rating: 1.0A
 - <3.2>Voltage rating: 36VAC/DC
 - <3.3>Dynamic Resistance:30mOhm Max (between max and min working height)
 - 4 Environmental performance
 - <4.1> RoHS compliant
 - <4.2>Operating Temperature range: -40°C~+85°C
 - <4.3>Withstanding High Temperature:260°C/10Sec
 - 5 Packaging:Bag.

Table 1:Mechanical performance		
Working Height	8.80mm	40±10gf
Durability	30000 Cycles Min.	

Top-Link Electronics Ltd.	
TOLERANCES UNLESS OTHER SPECIFIED	
0.0 = ± 0.15	
0.00 = ± 0.10	
0.000 = ±	
Angle: ±1°	
SURF. TEXTURE: REMOVE SHARP EDGES	
RO.05 MAX. DO NOT SCALE PRINT.	

Type	Customer drawing	Unit	mm
DRW:	Henry	APRD:	
CHK:	REL:		

Name	Pogo Pin		
Scale	Size	Part NO.	Page
1:1	A4	20101011555	1/1

Rev:	XA
------	----

top-link