



101485-1	PART NUMBER
----------	-------------

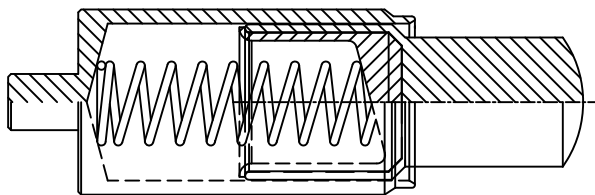

TOP-LINK

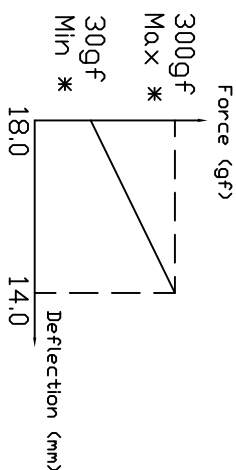

- Material:
- 1)Plunger & Body :Brass C3604
 - 2)Spring : Stainless steel wire
 - 3)Wedge and spring holder: LCP (L304G35)
- Plating
- 1)Body Min 0.125um Au over 1.4um Nickel plating
 - 2)Plunger Min 0.125um Pd over 1.4um Nickel plating
- Mechanical
- 1)Total stroke : 4.0^{+0.3}_{-0.2}mm
 - 2)Durability: 10,000 cycle min.
- Electrical
- 1)Contact resistance:20 mΩ max
 - 2)Rate voltage & Current: 12V DC 5A
- 5 Parts must be completely assembled and slide smoothly
 - 6 No rust or grease to be seen on finish part.
 - 7 No bending and any other hurt allowed on all parts after riveting.
 - 8 Part must be RoHS compliant and halogen free.
 - 9 The symbol * denotes that dimensions are critical and needs to be included on process inspection
 - 10 Customer P/N: VF-00006165-005