


DWG NO.
C-101390

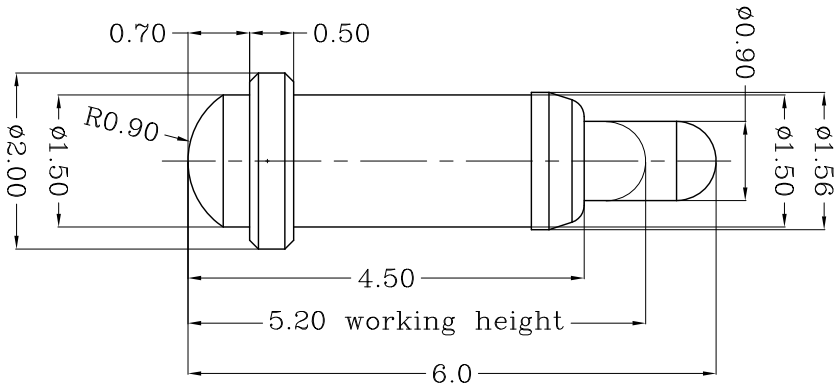

Material(材质): 

- 1)Body : C36000
- 2)Plunge : C36000 or C27000
- 3)Spring : Stainless steel wire

1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(B) ~~Buy~~: 鍍金0.1um Min 鍍底1.4um Min)

2. Layer: Min 0.4um Gold plating over min. 1.4um Nickel plating

3 Mechanical (机械性能):

1) Force: $100 \pm 30 \text{ gf}$ per pin at 0.8mm stroke

(力:1.5N,压力:0.8mm的力:100±30gf)

2) Total stroke (总行程) : 1.40mm

Reliability (寿命): 10,000 cycle min.


4 Electrical (电性能)

1) Contact resistance (接触抵抗): 30mOhm Max.

2. Output voltage rating (额定电压): 36V DC Max

3) Current rating (额定电流): 2.0A

TOP LINK

101390-1	
PART NUMBER	
	
DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED	
0 = ±	
0.0 = ±0.15	
0.00 = ±0.10	
0.000 = ±	
ANGLE: ±1°	
SURF. TEXTURE: 3.2/ REMOVE BURRS, BREAK SHARP EDGES 0.05 MAX DD NOT SCALE PRINT	
LDC - DIST -	
NEW	
REVISION RECORD	
APVD	
DATE 2009/11/25	
L TR	
MATL	
1	
DWN	
QIN	
CHK	
APVD	
REL	
FIN	
HIT TR	
—	
—	
POGO PIN	
PG-1.5-0.7-2.0-0.5-1.5-4.5-6.0	
SCALE	
1:1	
A4	
DWG	
C-101390	
SHEET	
1 OF 1	
REV	
A	
Top-Link Electronics Ltd.	