



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101397

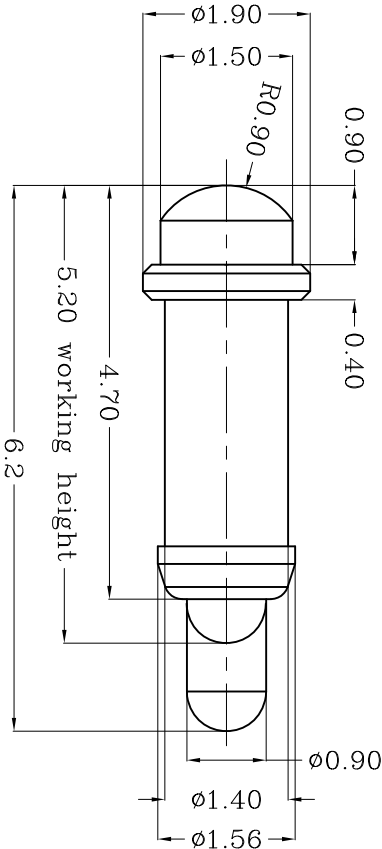

Notes:
△ Material(材质):

- 1) Body : C36000
- 2) Plunge : C36000 or C27000
- 3) Spring : Stainless steel wire
- 2 Plating(电镀):

- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
- 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3) Mechanical(机械性能):

- 1) Force: 110±30gf per pin at 1.0mm stroke (力: 压力1.0mm 的力: 110±30gf)
- 2) Total stroke(总行程) : 1.40mm
- 3) Durability(寿命): 10,000 cycle min.
- 4) Electrical(电性能)

- 1) Contact resistance(接触抵抗): 30mOhm Max.

- 2) Voltage rating(额定电压): 36V DC Max

- 3) Current rating(额定电流): 2.0A

TOP-LINK

USED DN
—

101397-1

PART NUMBER

MATL	△ 1	HT TR	FIN	—	△
DWN	QIN	APVD			
CHK		REL			

Top-Link
Electronics Ltd.

NAME POGO PIN

PG-1.5-0.9-2.0-0.4-1.4-4.7-6.2

SCALE 1:1 A4 DWG NO. C-101397

SHARP EDGES R0.05 MAX

REMOVE BURRS. BREAK

DD NOT SCALE PRINT

SURF. TEXTURE: 3.2/

ANGLE: ±1°

0.000 = ±

0.000 = ±0.10

0.000 = ±0.15

0 = ±-

TOLERANCES UNLESS

OTHER SPECIFIED

DIMENSIONS IN MM

NEW

REVISION

RECORD

LTR

DATE

APVD

4

3

2

1

SHEET 1 OF 1

REV 1