


DWG NO.
C-101397

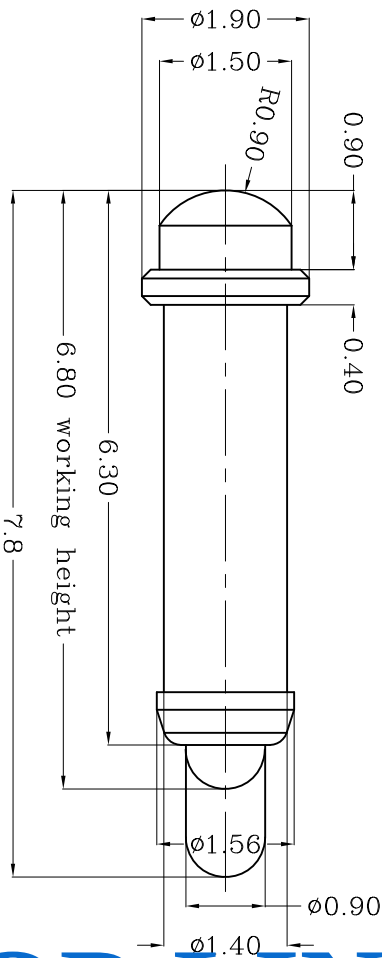

TOP-LINK

- 1) Body : C36000
- 2) Plunge : C36000 or C27000
- 3) Spring : Stainless steel wire
2. Plating(电镀):
 - 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
3. Mechanical(机械性能):
 - 1) Force: $110 \pm 30\text{gf}$ per pin at 1.0mm stroke (力: 下压1.0mm的力: $110 \pm 30\text{gf}$)
 - 2) Total stroke(总行程) : 1.40mm
 - 3) Durability(寿命): 10,000 cycle min.
4. Electrical(电性能)
 - 1) Contact resistance(接触抵抗): 30mOhm Max.
 - 2) Voltage rating(额定电压): 36V DC Max
 - 3) Current rating(额定电流): 2.0A

	NEW		2010/09/10
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATL		HT TR	—	FIN	— 
0	= ±-	DWN	APVD	<i>Top-Link</i>		Top-Link			
0.0	= ±0.15	he		<i>Electronics</i>		Electronics Ltd.			
0.00	= ±0.10	CHK	REL						
0.000	= ±								
ANGLE: ±1°									
SURF. TEXTURE: 32/ 									
REMOVE BURRS, BREAK									
SHARP EDGES R0.05 MAX									
DO NOT SCALE PRINT									
NAME		PG0G PIN							
SCALE		PG-1.5-0.9-2.0-0.4-1.4-6.3-7.8							
1:1	A4	DWG NO.	C-101453	SHEET		1 OF 1		REV 1	

101453-1
PART NUMBER

USED ON