
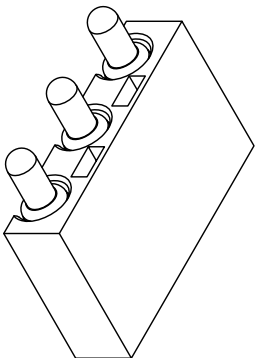
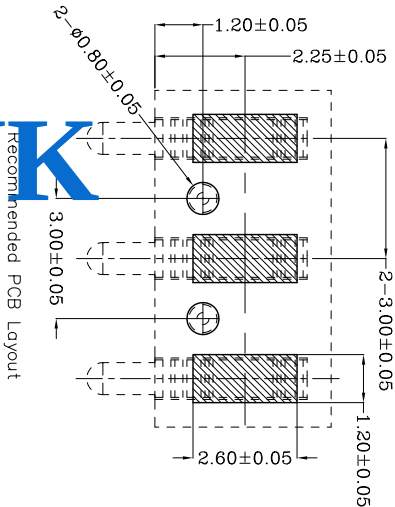



DWG NO.
C-100574

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC	-
DIST	-

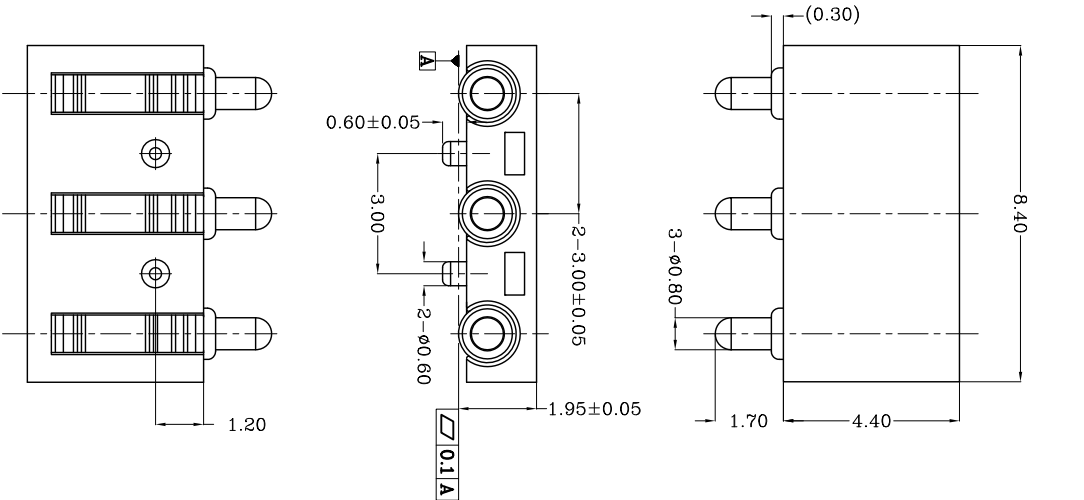

TOP-LINK

Notes:

1 Material(材质):

Housing: HTN, UL94 V-0 Color Black.

Contact: Brass

Spring :Stainless steel wire

2 Plating:

Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:

Force:120±25gf per pin at 1.0mm stroke

(力:下压1.0mm的力:140±25gf)

Total stroke(总行程): 1.40mm

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ±

0.0 = ±0.15

0.00 = ±0.10

0.000 = ±

ANGLE: ±1°

SURF TEXTURE: 32/

REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL

1

HT TR

—

FIN

—

DWN

Qin

APVD

CHK

REL

Top-Link
Electronics

Top-Link
Electronics Ltd.

NAME

PGOG CONNECTOR 3 POSITIONS RIGHT ANGLE
PGC-144-6.1-RA-3P-3.0PH

SCALE

1:1

A4

DWG

NO.

C-100574

SHEET

1 OF 1

REV

A

100574-3

PART NUMBER

USED ON

—